


# MANOUVERING GLANDS



## GENERAL DATA

TYPE	MAX ROPE DIAMETER		SAFE WORKING LOAD SF = 5:1		APPROXIMATE WEIGHT	
	mm	in	kgf	tonf	kg	lb
MG 1	32	1 1/4	6096	6	50	110
MG 2	41	1 5/8	10160	10	61	135
MG 3	51	2	20320	20	117	257
MG 4	60	2 3/8	30480	30	233	514
MG 5	76	3	40641	40	314	692

ton = 2240 lb

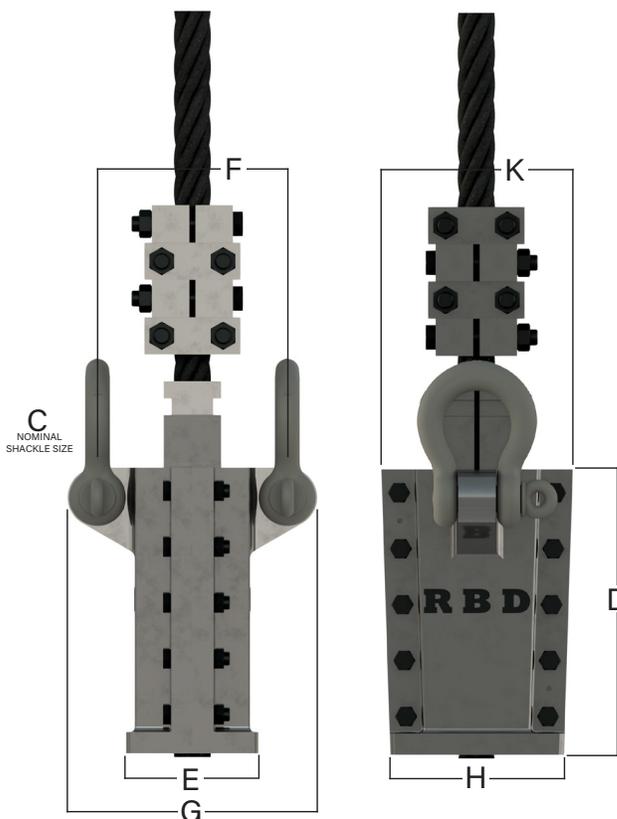

## DIMENSIONS

TYPE	C		D		E		F		G		H		K	
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
MG 1	26	1	305	12	114	4 1/2	197	7 3/4	273	10 3/4	184	7 1/4	203	8
MG 2	32	1 1/4	356	14	124	4 7/8	225	8 7/8	321	12 5/8	210	8 1/4	232	9 1/8
MG 3	35	1 3/8	406	16	162	6 3/8	276	10 7/8	384	15 1/8	235	9 1/4	260	10 1/4
MG 4	38	1 1/2	432	17	190	7 1/2	330	13	454	17 7/8	280	11	305	12
MG 5	44	1 3/4	536	21 1/8	248	9 3/4	356	14	468	18 1/2	324	12 3/4	358	14 1/8