


# SS/WF/NU GLANDS



## GENERAL DATA

TYPE	MAX ROPE DIAMETER		SAFE WORKING LOAD SF = 5:1		APPROXIMATE WEIGHT	
	mm	in	kgf	tonf	kg	lb
SS/WF/NU 08	32	1 1/4	6096	6	91	200
SS/WF/NU 09	41	1 5/8	10160	10	113	250
SS/WF/NU 10	51	2	20320	20	218	480
SS/WF/NU 11	60	2 3/8	30480	30	299	660
SS/WF/NU 12	76	3	40640	40	408	900

ton = 2240 lb

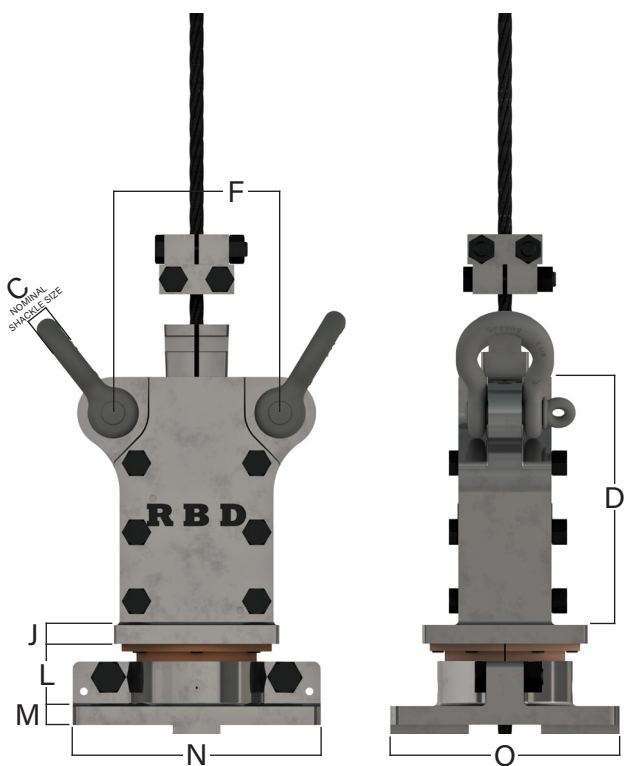

## DIMENSIONS

TYPE	C		D		F		J		L		M		N		O	
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
SS/WF/NU 08	26	1	305	12	194	7	26	1	70	2 3/4	26	1	330	13	305	12
SS/WF/NU 09	32	1 1/4	330	13	222	8 3/4	26	1	81	3 3/16	26	1	330	13	305	12
SS/WF/NU 10	38	1 1/2	406	16	267	10 1/2	26	1	105	4 1/8	32	1 1/4	406	16	356	14
SS/WF/NU 11	51	2	425	16 3/4	317	12 1/2	32	1 1/4	105	4 1/8	32	1 1/4	406	16	356	14
SS/WF/NU 12	57	2 1/4	495	19 1/2	364	14 5/16	38	1 1/2	117	4 5/8	38	1 1/2	457	18	406	16