



THIMBLE CAPPELS

GENERAL DATA

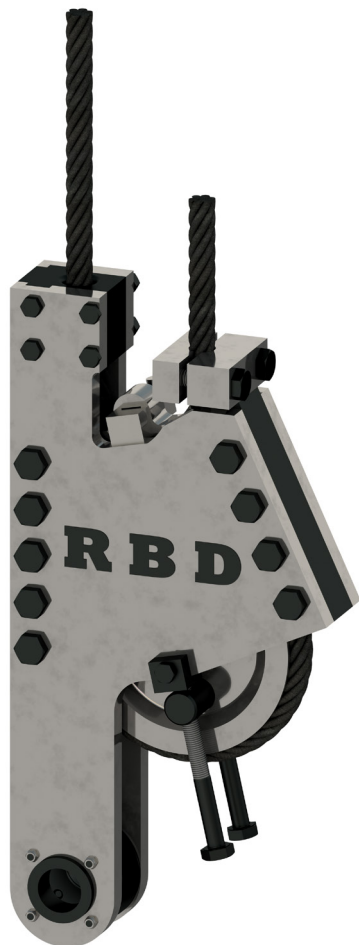

TYPE	ROPE DIAMETER		SAFE WORKING LOAD SF = 10:1		APPROXIMATE WEIGHT	
	mm	in	kgf	tonf	kg	lb
RBD 6	16 - 27	5/8 - 1 1/16	6096	6	60	132
RBD 8.5	27 - 32	1 1/16 - 1 1/4	8636	8 1/2	82	180
RBD 14	26 - 41	1 - 1 5/8	14224	14	176	387
RBD 17.25	41 - 46	1 5/8 - 1 3/4	17526	17 1/4	270	594
RBD 25	45 - 54	1 3/4 - 2 1/8	25400	25	390	858

ton = 2240 lb

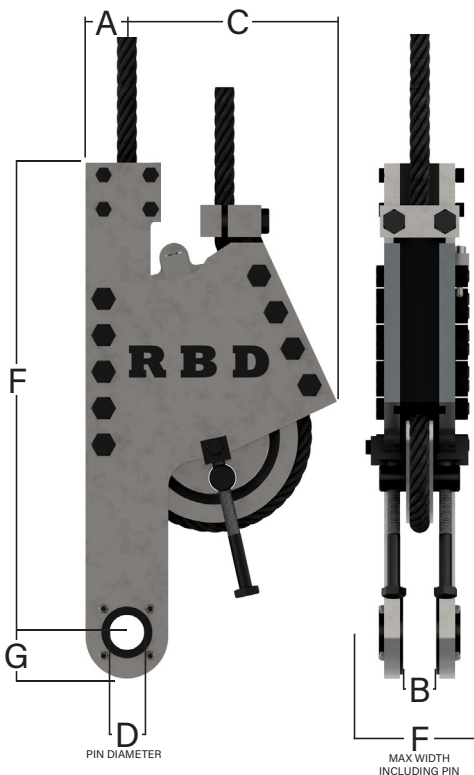

DIMENSIONS

TYPE	A		B		C		D		E		F		G	
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
RBD 6	60	2 3/8	38	1 1/2	240	9.44	38	1 1/2	117	4.60	644	25.35	45	1 3/4
RBD 8.5	60	2 3/8	45	1 3/4	278	10.94	45	1 3/4	137	5.39	635	25.00	51	2
RBD 14	81	3 3/16	57	2 1/4	400	15.75	57	2 1/4	163	6.41	819	32.24	70	2 3/4
RBD 17.25	92	3 5/8	64	2 1/2	388	15.27	64	2 1/2	189	7.44	969	38.15	70	2 3/4
RBD 25	103	4	76	3	480	18.89	76	3	217	8.54	1080	42.52	82	3 1/4