
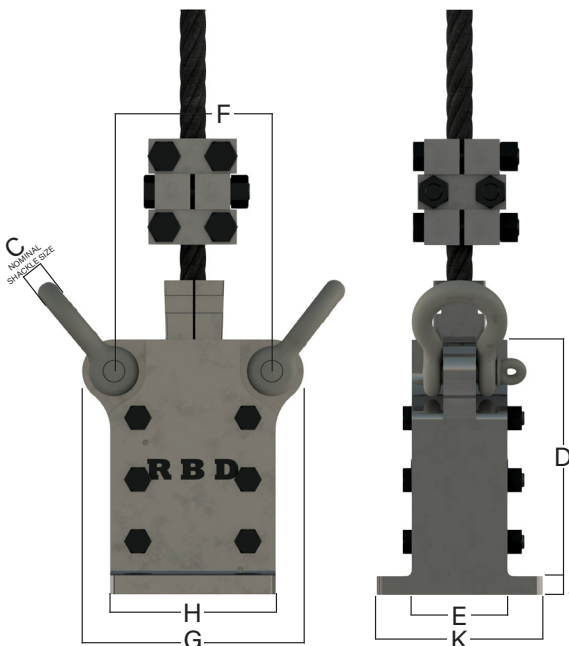


# NU GLANDS

## GENERAL DATA

TYPE	MAX ROPE DIAMETER		SAFE WORKING LOAD SF = 5:1		APPROXIMATE WEIGHT	
	mm	in	kgf	tonf	kg	lb
NU 1	32	1 1/4	6096	6	59	130
NU 2	41	1 5/8	10160	10	82	180
NU 3	51	2	20320	20	144	317
NU 4	60	2 3/8	30480	30	233	514
NU 5	76	3	40640	40	313	690
NU 6	83	3 1/4	60960	60	499	1100
NU 7	95	3 3/4	81280	80	746	1646

ton = 2240 lb

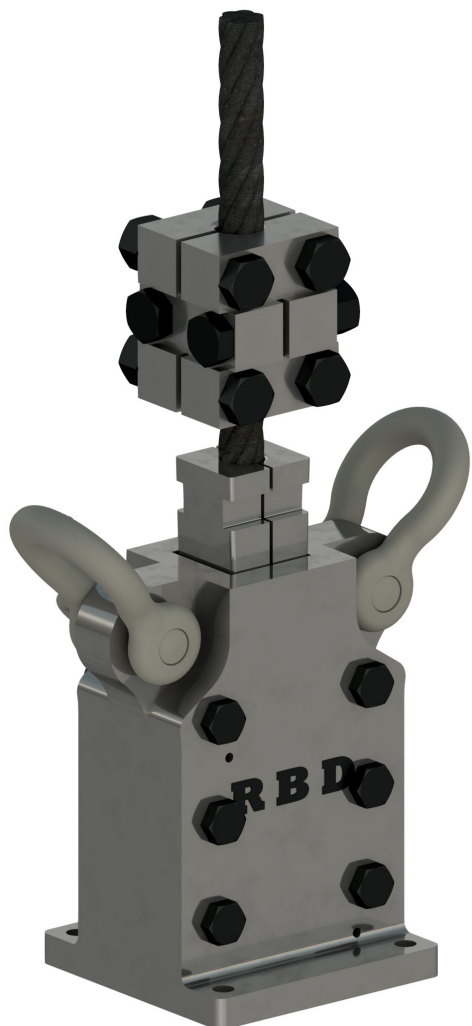

## DIMENSIONS

TYPE	C		D		E		F		G		H		J		K	
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
NU 1	26	1	305	12	114	4 1/2	184	7 5/8	270	10 5/8	184	7 1/4	26	1	184	7 1/4
NU 2	32	1 1/4	330	13	124	4 7/8	229	8 3/4	317	12 1/2	210	8 1/4	26	1	222	8 3/4
NU 3	38	1 1/2	406	16	162	6 3/8	292	10 1/2	375	14 3/4	279	11	26	1	280	11
NU 4	51	2	425	16 3/4	190	7 1/2	317	12 1/2	441	17 3/8	279	11	32	1 1/4	292	11 1/2
NU 5	57	2 1/4	495	19 1/2	216	8 1/2	364	14 5/16	497	19 9/16	324	12 3/4	38	1 1/2	317	12 1/2
NU 6	67	2 5/8	578	22 3/4	235	9 1/4	432	17	610	24	407	16	45	1 3/4	356	14
NU 7	82	3 1/4	616	24 1/4	267	10 1/2	470	18 1/2	673	26 1/2	445	17 1/2	51	2	407	16